


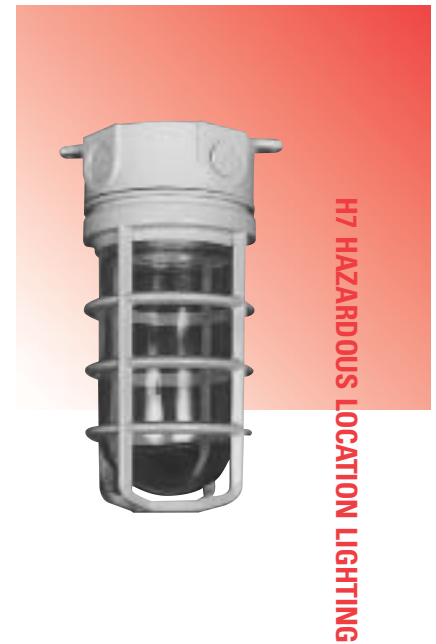
# H7 ENCLOSED AND GASKETED LUMINAIRE

## APPLICATIONS

- For outdoor non-hazardous locations where lamp protection from rain and the elements is needed

## SPECIFICATION FEATURES

-  Listed 1598 *Suitable for Wet Locations*
- Standard construction is IP55
- Low copper aluminum alloy housing with gray paint finish
- Uses incandescent lamps up to 150 watts (A-21)
- Luminaires are single packed and shipped in one carton






H7 HAZARDOUS LOCATION LIGHTING

## ORDERING NUMBER LOGIC

PRODUCT IDENT	VOLTAGE	LAMP TYPE	MOUNTING	OPTICAL
XX H7 = An Enclosed and Gasketed Luminaire	X 60 Hz* X = 250 volt maximum *For 50 Hz, contact factory	XXX 15F = 150 watt Medium Base Incandescent A-21 Bulb 250 volt max Standard: Lamp not included	XX 3C = 3/4-in. Ceiling 3P = 3/4-in. Pendant 3W = 3/4-in. Wall	XX DD = Clear Globe with Guard

## FIXTURE DIMENSIONS

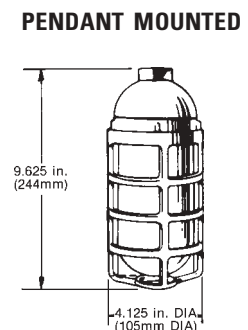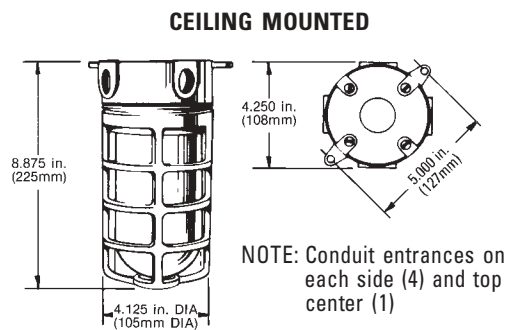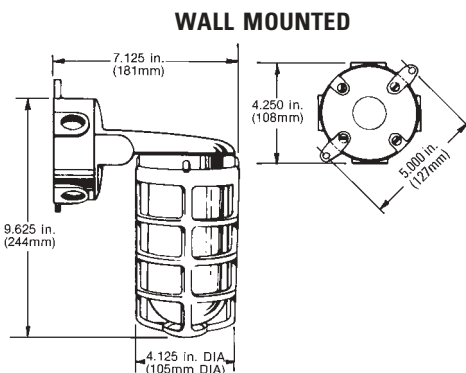

## REFERENCES

See Page H-36 for start of Accessories.

## DATA

Approximate Net Weight	lbs	kgs
Pendant with guard	2.75	1.25
Ceiling with guard	2.75	1.25
Wall bracket with guard	3.30	1.50